

NTF
NUOVE TECNOLOGIE DEL FREDDO






FROZEN SNOW



Modular ice maker - Granular system
Daily production 1000 kg

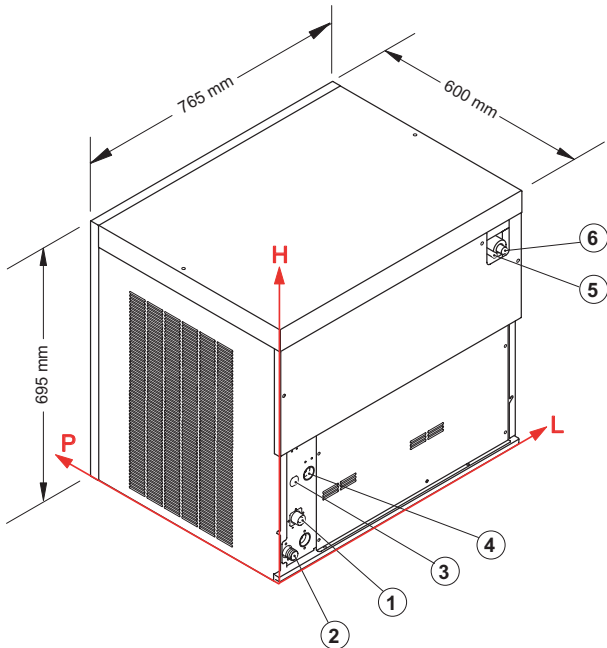

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
71 mm - 140 mm - 3/4"
- ② Water Outlet:
44 mm - 60 mm - 24 mm
- ③ Remote connection:
111 mm - 240 mm
- ④ Electrical connection:
67 mm - 240 mm
- ⑤ Refrigerant feeding pipe
- ⑥ Outlet pipe of gaseous refrigerant

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	1000 kg
Refrigerant	R404A - R507 - R448A - R449A - R407F - R452A
Refrigerant capacity	4600 W (evap. temp. -18° C)
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	350 W
Sizes (L-P-H mm)	765 - 600 - 695
Sizes with pack (L-P-H mm)	860 - 690 - 890
Net weight	118 kg
Gross weight	132 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

		
Refrigerant capacity 2300 W (evap. temp. -18° C)	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremaicegroup.it

