






Self-contained ice maker - Paddle system Daily production up to 55 kg

Position n°



Available dice size



Application fields

Restaurant Fast food Bar	Supermarket SPA Medical	
Disco	Industry	

• Features & Plus

- Hollow cube 20 gr
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model

• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	55
21° C	15° C	45
32° C	21° C	34



• Certifications available for this model
























Self-contained ice maker - Paddle system Daily production up to 55 kg

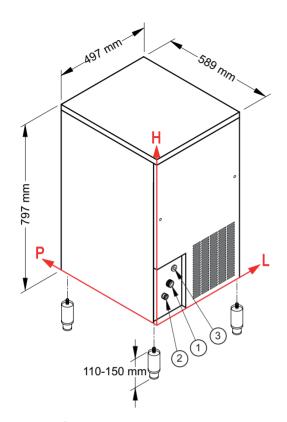

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 129 mm - 132 mm - 3/4"
- 2 Water outlet: 56 mm - 154 mm - 24 mm
- 3 Electrical connection: 94 mm - 202 mm

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	45 kg	
Store capacity, up to	20 kg	
Cooling system	A - W	
Kind of cube	20 g	
Refrigerant	R290	
Standard voltage	220-240 V ~ 50 Hz	
Electrical consumption	420 W	
Fuse	10 A	
Water consumption	A: 4 l/kg	
	W: 13 l/kg	
Sizes (L-P-H mm)	497 - 589 - 797	
Sizes with pack (L-P-H r	mm) 550 - 630 - 960	
Net weight	54 kg	
Gross weight	62 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:











Sizes without feet

Standard Cube (20 g)

Ambient temperature

Water temperature +21° C +15° C

Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





