






Self-contained ice maker - Paddle system Daily production up to 30 kg

## Position n°



## • Available dice size



# Application fields

### • Features & Plus

- Hollow cube 20 gr
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Undercounter model

#### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	30
21° C	15° C	20
32° C	21° C	16



• Certifications available for this model
























Self-contained ice maker - Paddle system Daily production up to 30 kg

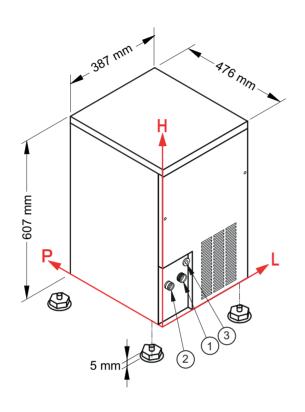

# Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 129 mm - 137 mm - 3/4"
- 2 Water outlet: 56 mm - 137 mm - 24 mm
- ③ Electrical connection: 89 mm 180 mm

# Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

# • Technical information

Production in 24h 20 kg		
Store capacity, up to	4 kg	
Cooling system	A - W	
Kind of cube	20 g	
Refrigerant	R290	
Standard voltage	220-240 V ~ 50 Hz	
Electrical consumption	300 W	
Fuse	10 A	
Water consumption	A: 3 l/kg	
	W: 17 l/kg	
Sizes (L-P-H mm)	387 - 476 - 607	
Sizes with pack (L-P-H r	mm) 440 - 520 - 770	
Net weight	36 kg	
Gross weight	42 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:











Sizes without feet

Standard Cube (20 g) Ambient temperature +21° C

ient Water rature temperature ° C +15° C Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





