



Self-contained ice maker - Paddle system
Daily production up to 87 kg

[illegible]

► Features & Plus

- Hollow cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- FDA approved -ABS water basin
- Basin tipping safety system
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages



► Position n°



AISI 304 SS Scotch
Brite finish



Removable and cleanable air filter




FDA approved - ABS
water basin



Disappearing insulated door

► Available ice cube size



► Prod. 24h

	Air temp.		Water temp.		kg	lbs
10° C	50° F	7° C	45° F	87	192	
21° C	70° F	15° C	60° F	75	165	

2 Years Warranty

subject to limitations

► **Certifications available for this model**






Ice Finger

IMF 80



Self-contained ice maker - Paddle system Daily production up to 87 kg

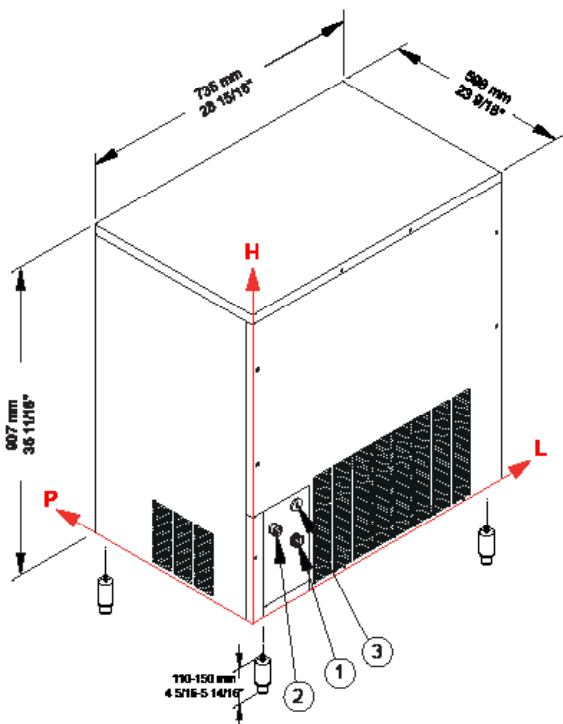

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	87 kg					
	50° F		192 lbs				
	21° C			75 kg			
	70° F				165 lbs		
	32° C					60 kg	
	90° F						132 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 126 mm / 4 15/16" - 180 mm / 7 1/16" - 3/4"
 ② Water out.: 61 mm / 2 6/16" - 246 mm / 9 11/16" - 24 mm / 15/16"
 ③ Electrical connections: 126 mm / 4 15/16" - 280 mm / 11"

► Technical information

Production in 24h	75 kg / 165 lbs
Store capacity, up to	30 kg / 66 lbs
Cooling system	A - W
Kind of cube	A-20g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	465 W
Fuse	10 A
Finish	AISI 304 stainless steel, scotch brite

Water consumption	A: 3,3 l/kg - 39,5 gal/100 lbs W: 10,5 l/kg - 125,8 gal/100 lbs
Sizes (L-P-H mm)	735 - 598 - 907
(L-P-H in)	28 15/16 - 23 9/16 - 35 11/16
Sizes with pack (L-P-H mm)	780 - 640 - 1070
(L-P-H in)	30 11/16 - 25 3/16 - 42 2/16
Net weight	75 kg / 165 lbs
Gross weight	87 kg / 192 lbs

All the technical information must be considered at the following conditions:

Sizes without feet
 Standard Cube (20 g)
 Ambient temperature +21° C
 Water temperature +15° C
 Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremaicegroup.it

We are Brema

