



Fronzen Dice

SL 140 R290 NTC

Frozen Qube



Self-contained ice maker - Sprayer system Daily production up to 76 kg

Hotel	● ● ● ● ● ● ● ●	Hotel	● ● ● ● ● ● ● ●
Restaurant	● ● ● ● ● ● ● ●	Restaurant	● ● ● ● ● ● ● ●
Fast food	● ● ● ● ● ● ● ●	Fast food	● ● ● ● ● ● ● ●
Bar	● ● ● ● ● ● ● ●	Bar	● ● ● ● ● ● ● ●
Disco	● ● ● ● ● ● ● ●	Disco	● ● ● ● ● ● ● ●
Fish markets	● ● ● ● ● ● ● ●	Fish markets	● ● ● ● ● ● ● ●
Supermarkets	● ● ● ● ● ● ● ●	Supermarkets	● ● ● ● ● ● ● ●
Medical & SPA	● ● ● ● ● ● ● ●	Medical & SPA	● ● ● ● ● ● ● ●
Industry	● ● ● ● ● ● ● ●	Industry	● ● ● ● ● ● ● ●



Available Drain Pump (DP) version



Available Drain Pump (DP) version

► Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 °C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet

2 Years Warranty subject to limitations

► Certifications available for this model



www.ntfice.it
info@bremaicegroup.it


We are Brema Group





Self-contained ice maker - Sprayer system

Daily production up to 76 kg

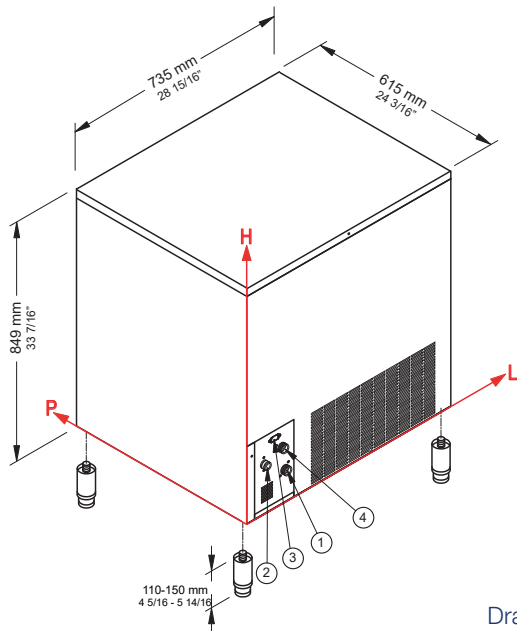


► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Available ice cube size

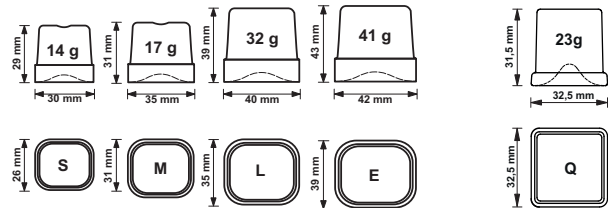

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	76 kg					
	50° F		168 lbs				
	21° C			70 kg			
	70° F				154 lbs		
	32° C					62 kg	
	90° F						137 lbs

► Connections standard version

- ① Water in.: 135mm / 5 5/16" - 122mm / 4 13/16" - 3/4"
- ② Water out.: 62mm / 2 7/16" - 182mm / 7 3/16" - 24mm / 15/16"
- ③ Electrical connections: 100mm / 3 15/16" - 252mm / 9 15/16"
- ④ Condenser water in. (only W):
124mm / 4 14/16" - 208mm / 8 3/16" - 3/4"

* Only for water cooling systems

Connections DP version

- 1 Water in.: 135mm / 5 5/16" - 190mm / 7 8/16" - 3/4"
- 2 Water out.: 72mm / 2 13/16" - 51mm / 2" - 24mm / 15/16"
- 3 Electrical connection: 60mm / 2 6/16" - 257mm / 10 2/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

► Technical information

Production in 24h	70 kg / 154 lbs
Store capacity, up to	40 kg / 88 lbs
Cooling system	A - W
Kind of cube	14-17-32-41g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	590 W
Fuse	10 A
Electrical consumption	22 kWh/100kg

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (17 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Electrical consumption at +32° C (standard voltage)
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Water consumption	A: 4 l/kg - 47,9 gal/100lbs
	W: 16 l/kg - 191,7 gal/100lbs
Sizes (L-P-H mm)	735 - 615 - 849
(L-P-H in)	28 15/16 - 24 3/16 - 33 7/16
Sizes with pack (L-P-H mm)	780 - 640 - 1015
(L-P-H in)	30 11/16 - 25 3/16 - 39 15/16
Net weight	67 kg / 148 lbs
Gross weight	79 kg / 174 lbs
Finish	Stainless steel 18/8, scotch brite

