



Fronzen Dice


SL 260 R290 NTC

Frozen Qube




Self-contained ice maker - Sprayer system Daily production up to 95 kg

Hotel
Restaurant
Fast food
Bar
Disco
Fish markets
Supermarkets
Medical & SPA
Industry



Hotel
Restaurant
Fast food
Bar
Disco
Fish markets
Supermarkets
Medical & SPA
Industry



Available Drain Pump (DP) version



Available Drain Pump (DP) version

► Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 °C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet

2 Years Warranty

subject to limitations

► Certifications available for this model



www.ntfice.it
info@bremaicegroup.it

We are Brema Group





Frozen Dice


SL 260 R290 NTC

Frozen Qube




Self-contained ice maker - Sprayer system

Daily production up to 95 kg

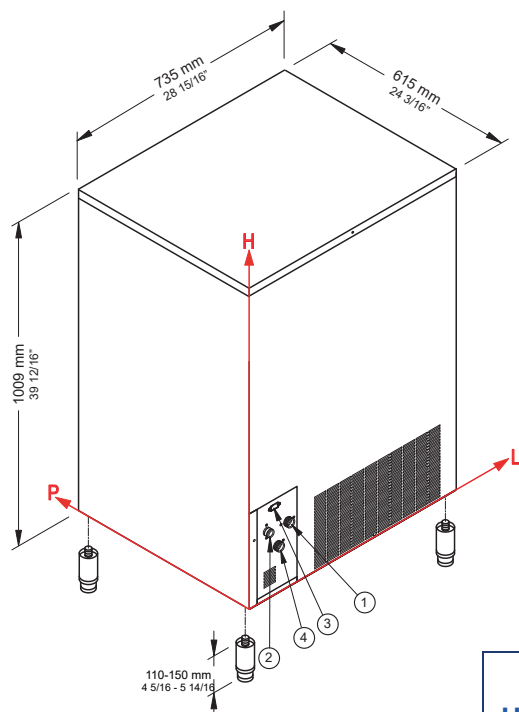


Drain Pump

**► Working conditions**

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

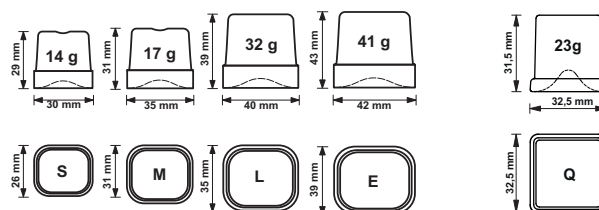► Available ice cube size**► Performances**

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	95 kg					
	50° F		209 lbs				
	21° C			93 kg			
	70° F				205 lbs		
	32° C					80 kg	
	90° F						176 lbs

► Connections standard version

- ① Water in.: 135mm / 5 5/16" - 237mm / 9 5/16" - 3/4"
- ② Water out.: 62mm / 2 7/16" - 242mm / 9 8/16" - 24mm / 15/16"
- ③ Electrical connections: 100mm / 3 15/16" - 312mm / 12 5/16"
- ④ Condenser water in. (only W): 98mm / 3 14/16" - 177mm / 6 15/16" - 3/4"

* Only for water cooling systems

Connections DP version

- 1 Water in.: 135mm / 5 5/16" - 192mm / 7 9/16" - 3/4"
- 2 Water out.: 72mm / 2 13/16" - 53mm / 2 1/16" - 24mm / 15/16"
- 3 Electrical connection: 100mm / 3 15/16" - 312mm / 12 5/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

► Technical information

Production in 24h	93 kg / 205 lbs
Store capacity, up to	60 kg / 132 lbs
Cooling system	A - W
Kind of cube	14-17-32-41g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	870 W
Fuse	10 A
Electrical consumption	23 kWh/100kg

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (17 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Water consumption	A: 2,3 l/kg - 27,6 gal/100 lbs
	W: 16,5 l/kg - 197,7 gal/100 lbs
Sizes (L-P-H mm)	735 - 615 - 1009
(L-P-H in)	28 15/16 - 24 3/16 - 39 12/16
Sizes with pack (L-P-H mm)	780 - 640 - 1185
(L-P-H in)	30 11/16 - 25 3/16 - 46 10/16
Net weight	74 kg / 163 lbs
Gross weight	86 kg / 190 lbs
Finish	Stainless steel 18/8, scotch brite

Rev. 00 - Issued February 2026



www.ntfice.it
info@bremalicegroup.it

We are NTF

