



Fronzen Dice

SL 350 R290

Frozen Qube



Self-contained ice maker - Sprayer system Daily production up to 160 kg

Hotel	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●

Hotel	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●



Available Drain Pump (DP) version



Available Drain Pump (DP) version

► Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

2 Years Warranty subject to limitations

► Certifications available for this model



www.ntfice.it
info@bremaicegroup.it

We are Brema Group





Frozen Dice


SL 350 R290

Frozen Qube



Self-contained ice maker - Sprayer system

Daily production up to 160 kg

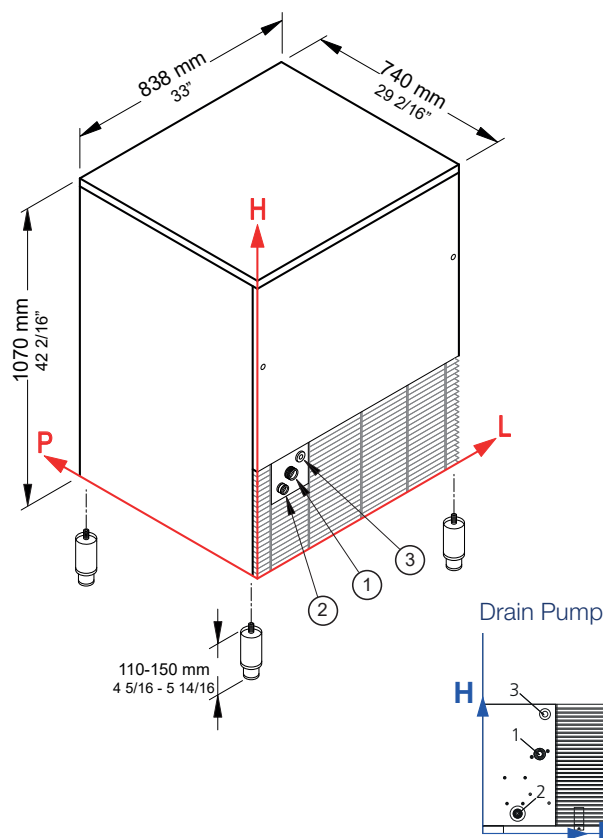


► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Available ice cube size

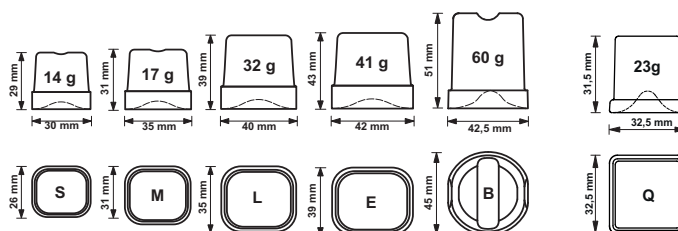

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	160 kg					
	50° F		353 lbs				
	21° C			152 kg			
	70° F				335 lbs		
	32° C					138 kg	
	90° F						304 lbs

► Connections standard version

- ① Water in.: 141mm / 5 9/16" - 290mm / 11 7/16" - 3/4"
- ② Water out.: 79mm / 3 2/16" - 245mm / 9 10/16" - 24mm 15/16"
- ③ Electrical connections: 186mm / 7 5/16" - 326mm / 12 13/16"

Connections DP version

- 1 Water in.: 151mm / 5 15/16" - 209mm / 8 4/16" - 3/4"
- 2 Water out.: 92mm / 3 10/16" - 52mm / 2 1/16" - 24mm / 15/16"
- 3 Electrical connection: 165mm / 6 8/16" - 314mm / 12 6/16"

* Only for water cooling systems

All measures are referred to the rear bottom-left corner (L-H-Ø)

► Technical information

Production in 24h	152 kg / 335 lbs
Store capacity, up to	65 kg / 143 lbs
Cooling system	A - W
Kind of cube	14-17-32-41-60g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	1150 W
Fuse	16 A
Electrical consumption	20 kWh/100kg

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (17 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Water consumption	A: 2 l/kg - 24,0 gal/100 lbs
	W: 11,9 l/kg - 142,6 gal/100 lbs
Sizes (L-P-H mm)	838 - 740 - 1070
(L-P-H in)	33 - 29 2/16 - 42 2/16
Sizes with pack (L-P-H mm)	880 - 785 - 1245
(L-P-H in)	34 10/16 - 30 14/16 - 49
Net weight	118 kg / 260 lbs
Gross weight	138 kg / 304 lbs
Finish	Stainless steel 18/8, scotch brite



www.ntfice.it
info@bremaicegroup.it

We are NTF



Rev. 00 - Issued February 2026