



Fronzen Dice

SL 70 R290

Frozen Qube



Self-contained ice maker - Sprayer system Daily production up to 42 kg

Hotel	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●

Hotel	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●



Available Drain Pump (DP) version



Available Drain Pump (DP) version

► Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 °C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet
- Undercounter model

2 Years Warranty subject to limitations

► Certifications available for this model



www.ntfice.it
info@bremaicegroup.it

We are Brema Group





Frozen Dice


SL 70 R290

Frozen Qube



Self-contained ice maker - Sprayer system

Daily production up to 42 kg

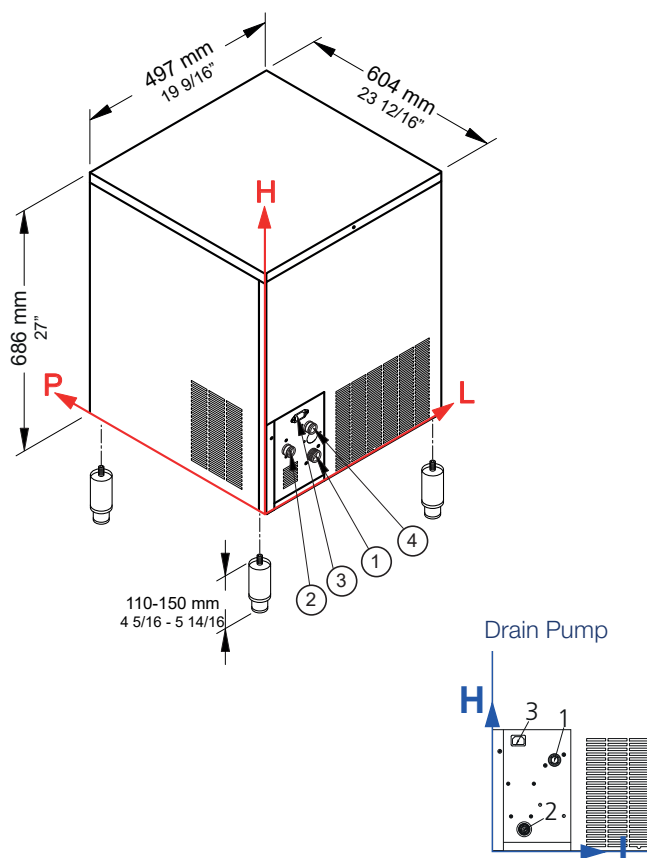


► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Available ice cube size

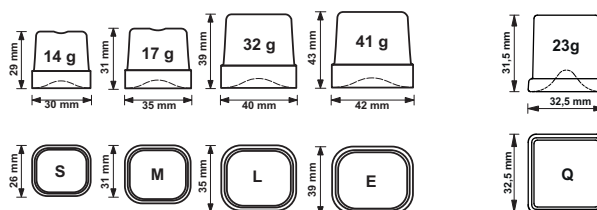

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	42 kg					
	50° F		93 lbs				
	21° C			38 kg			
	70° F				84 lbs		
	32° C					30 kg	
	90° F						66 lbs

► Connections standard version

- ① Water in.: 130mm / 5 2/16" - 95mm / 3 12/16" - 3/4"
- ② Water out.: 56mm / 2 3/16" - 155mm / 6 2/16" - 24mm / 15/16"
- ③ Electrical connections: 95mm / 3 12/16" - 225mm / 8 14/16"
- ④ Condenser water in. (only W): 119mm / 4 11/16" - 181mm / 7 2/16" - 3/4"

* Only for water cooling systems

Connections DP version

- 1 Water in.: 130mm / 5 2/16" - 190mm / 7 8/16" - 3/4"
- 2 Water out.: 65mm / 2 9/16" - 51mm / 2" - 24mm / 15/16"
- 3 Electrical connection: 55mm / 2 3/16" - 231mm / 9 2/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

► Technical information

Production in 24h	38 kg / 84 lbs
Store capacity, up to	16 kg / 35 lbs
Cooling system	A - W
Kind of cube	14-17-32-41g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	340 W
Fuse	10 A
Electrical consumption	22 kWh/100kg

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (17 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Water consumption	A: 3 l/kg - 35,9 gal/100lbs
	W: 13,5 l/kg - 161,8 gal/100lbs
Sizes (L-P-H mm)	497 - 604 - 686
(L-P-H in)	19 9/16 - 23 12/16 - 27
Sizes with pack (L-P-H mm)	550 - 660 - 860
(L-P-H in)	21 10/16 - 26 - 33 14/16
Net weight	40 kg / 88 lbs
Gross weight	48 kg / 106 lbs
Finish	Stainless steel 18/8, scotch brite

Rev. 00 - Issued February 2026



www.ntfice.it
info@bremalicegroup.it

We are NTF

