



NTF
NUOVE TECNOLOGIE DEL FREDDO

- Position n°



Hotel		Fish market	
Restaurant		Supermarket	
Fast food		SPA	
Bar		Medical	
Disco		Industry	

- Subcooled flakes (from -5°C to -10°C)
- 1 m³ = 430 kg of ice
- Low consumption (1 liter water / 1 kg ice)
- AISI 304 SS Scotch Brite finish
- Evaporator anticorrosive alloy made, with rotating knife
- Cleanable antiscaling filter
- Easy cleaning thanks to rounded surfaces
- FDA approved -ABS plastic components
- Conformity to RoHS directive
- Automatic water charge
- Standard and special voltages
- Model in Tropical Class + 43 ° C

subject to limitations




www.bremagroup.it
info@bremagroup.it



Split 11000

FROZEN ICE

Modular ice maker - Scale system
Daily production 5000 kg

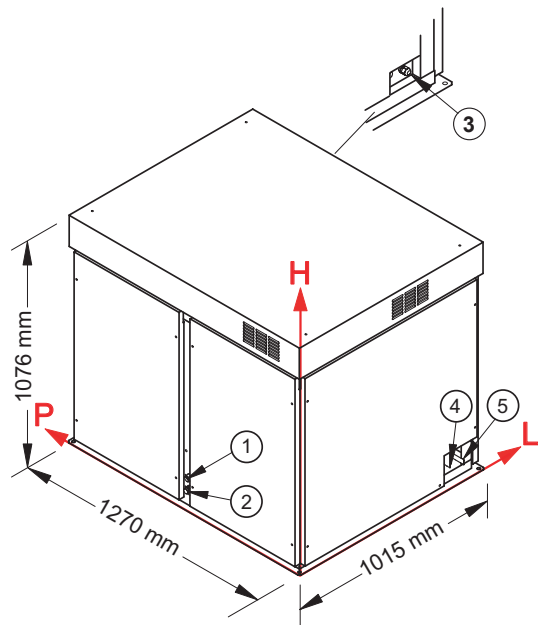

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
635 mm - 135 mm - 3/4"
- ② Water outlet:
635 mm - 80 mm - 24 mm
- ③ Electrical connection
- ④ Refrigerant feeding pipe
- ⑤ Outlet pipe of gaseous refrigerant

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	5000 kg
Refrigerant	R404A - R507 - R448A - R449A - R407F - R452A
Refrigerant capacity	25000 W (evap. temp. -27° C)
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	360 W
Sizes (L-P-H mm)	1270 - 1015 - 1076
Sizes with pack (L-P-H mm)	1394 - 1139 - 1420
Net weight	600 kg
Gross weight	620 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

		
Refrigerant capacity 25000 W (evap. temp. -27° C)	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025

