



NUOVE TECNOLOGIE DEL FREDDO

- Position n°



- BIN 1200DD
- DRB 1100

Hotel		Fish market	
Restaurant		Supermarket	
Fast food		SPA	
Bar		Medical	
Disco		Industry	

- Subcooled flakes (from -5°C to -10°C)
- Low consumption (1 liter water / 1 kg ice) - aircooled vers.
- Electromechanical functioning
- External structure AISI 304 Scotch Brite
- Stainless steel frame
- Evaporator anticorrosion alloy made, with rotating knife
- Air Cooling and Water Cooling systems
- Standard and special voltages
- $1 \text{ m}^3 = 430 \text{ kg}$ of ice
- ABS plastic components, FDA approved
- Easy cleaning thanks to rounded surfaces
- Cleanable antiscaling filter
- Removable and cleanable air filter
- Conformity to RoHS directive
- Automatic water charge
- Model in Tropical Class + 43 ° C

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	1560
21° C	15° C	1500
32° C	21° C	1200

subject to limitations



www.bremagroup.it
info@bremagroup.it




SM 3300



FROZEN ICE



Modular ice maker - Scale system
Daily production up to 1560 kg

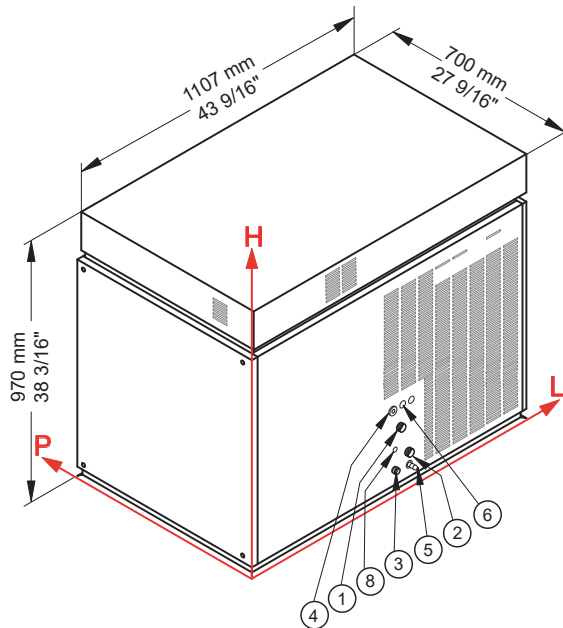

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
563 mm - 192 mm - 3/4"
- ② Condenser water inlet:
563 mm - 125 mm - 3/4"
- ③ Water outlet:
528 mm - 65 mm - 24 mm
- ④ Electrical connection:
532 mm - 262 mm
- ⑤ Condenser water outlet:
573 mm - 65 mm - 12mm
- ⑥ Remote connection:
574 mm - 262 mm
- ⑧ Connection to saline solution dosing pump:
515 mm - 159 mm

② ⑤ Only for water cooling systems

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	1500 kg
Cooling system	A - W
Refrigerant	R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	6000 W
Fuse	32 A
Water consumption	A: 1 l/kg W: 7 l/kg
Sizes (L-P-H mm)	1107 - 700 - 970
Sizes with pack (L-P-H mm)	1210 - 800 - 1185
Net weight	306 kg
Gross weight	342 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered
at the following conditions:

Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +21° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremaicegroup.it

