




Ice Pebbles

TB 551



Self-contained ice maker - Pebble system Daily production up to 59 kg

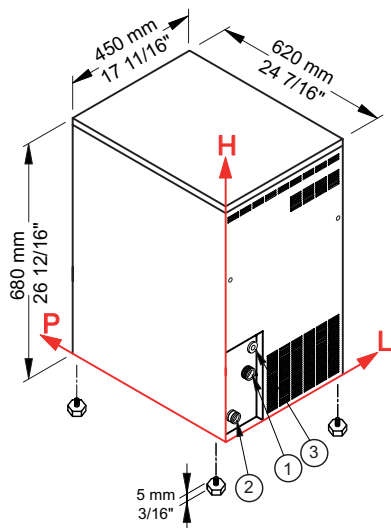

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
		10° C	59 kg				
Air temperature	50° F		130 lbs				
	21° C			55 kg			
	70° F				121 lbs		
	32° C					46 kg	
	90° F						101 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 106 mm / 4 3/16" - 135 mm / 5 5/16" - 3/4" ② Water out.: 55 mm / 2 3/16" - 55 mm / 2 3/16" - 24 mm / 15/16"
- ③ Electrical connections: 114 mm / 4 8/16" - 218 mm / 8 9/16"

► Technical information

Production in 24h	55 kg / 121 lbs
Store capacity, up to	10 kg / 22 lbs
Cooling system	A - W
Approximate pebble size	8 x 16 x 7
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	420 W
Fuse	10 A
Finish	AISI 304 stainless steel, scotch brite

Water consumption	A: 1 l/kg - 12,0 gal/100 lbs
	W: 5,3 l/kg - 63,5 gal/100 lbs
Sizes (L-P-H mm)	450 - 620 - 680
(L-P-H in)	17 11/16 - 24 7/16 - 26 12/16
Sizes with pack (L-P-H mm)	505 - 675 - 850
(L-P-H in)	19 14/16 - 26 9/16 - 33 7/16
Net weight	56 kg / 123 lbs
Gross weight	64 kg / 141 lbs

All the technical information must be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremagroup.it

We are Brema

